

360° Warning Light Strobes

HD310XX



- Produces 10 Joules
- 85 Quad flashes per minute
- Exceeds SAE J1318 Class 2 requirements.
- Amperage draws 1 amp @ 12.8 VDC
- Operating voltage 12-28 Volts.
- Dimensions: height
 - high dome 6.25"-(159mm),
 - low dome 4.25" (144 mm),
- Base diameter 6 5/16" (160)
- Optional Magnet Mount available
- Available in 5 Safety Colors: Red, Amber, Blue, Clear & Green.

MS208XX



- Produces 10 Joules
- Flashes a 10-joule quad flashing sequence.
- Exceeds SAE J1318 Class 3 requirements.
- Amperage draws .2 amps @12.8 VDC
- Operational Voltage 12-28 Volts.
- Compact design: 3.75" (95 mm) high, 5" (128 mm) dia.
- Universal base allows for standard and 1/2" pipe mount installation or optional magnet mount.
- Replaceable flash tube.
- Available in 5 Safety Colors: Red, Amber, Blue, Clear & Green.

Vehicle ID Panels

Positively identify vehicles on the job-site with bright, rugged LED displays that beam through dusty air and weather. Designed for 24 hour use, the Vehicle ID Display is programed for brighter illumination in the daytime and at sunset a sensor dims the LED output for nighttime use. This ID System allows you to conveniently change the ID Numbers as needed.



Completely sealed and silicone filled to protect from dirt, moisture, high-pressure washing, vibration and the jolts of loading and unloading haul trucks.

Power input:12V24V(w / optional voltage converter)

Power Rating:18W (two digit)26W (three digit)

18 lbs. (three digit)

Dimension:

17.25 x 17.25 (two digit)

17.75 x 25.75 (three digit)



Safety Vest and Arm Bands

Max-visibility, multi-pocket and zipper

SV011



Fluorescent Yellow Mesh with zipper

SV012



Fluorescent Yellow, solid nylon with Velcro

SV013



Fluorescent Soft Mesh with Reflective Yellow*

SV014



Fluorescent Orange Mesh with Reflective Yellow

SV015



*shown with Arm Band
Fluorescent Reflective **AB011**

Stainless Steel Whips

- Ultra Durable; *Work-site and Dune Tested*
- 1156 type Light Socket
- 7ft x 1/4 inch Solid Stainless Steel Rod
- Black or Red Rod Sheathing
- Standard Connectors
- Also available in non-powered version



Standard Connect Version
Shown on Black Sheathing
Stainless Steel Rod with
Stainless Steel Base.



Twist into 1156 Type
Light Socket



AWO7 Shown here with optional accessory
Light Head(Amber) in 1156 socket
and optional Safety FLAG-X

*Take advantage of our extensive line of Whip Light
Heads, LED or Self Contained Strobe Types.
Uses universal 1156 light head socket.*

Fiberglass Heavy Duty Whips



Breakdown Whip:


This segmented whip splits into 2
manageable pieces for storage in the
back of the truck, trunk or toolbox.
Assembles and disassembles in seconds.
W08BDQ (Breakdown) Whip & Optional Flag

w/1156 Light Socket & Quick Release Base*

Note: Powered Breakdown whips can be
ordered in sizes up to 8 feet



Non-Powered Breakdown whips can be
ordered in sizes up to 12 feet.
Call for pricing and custom lengths.

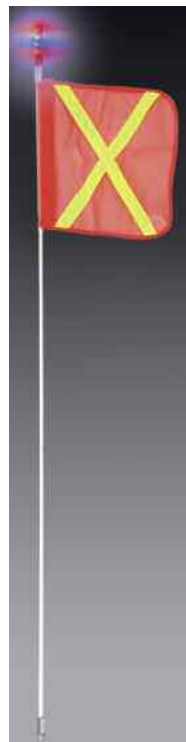

Solid Heavy Duty Whips

Available in

- 5ft to 12ft heights
- Threaded or Quick Release Base
- Powered or Non-Powered
- Optional Flags



Bases for Fiberglass Whips

For the standard threaded pole.
519.343 Optional threaded base



For Quick-Connect Whip Ends
SSQR2, Optional RCA type (left),
Stainless Steel, Quick-Connects base
(center)
SSQR1, Optional Single Wire Lead
Stainless Steel, Quick-Connects base
(right)

Flag Types



FLAG-M-1 shown left
11.5 x 11.5 inch
Standard Mini Mesh Flag



FLAG-X optional 16x 16 inch
Safety Flag with Reflective X
shown at left



RCA1 RCA Jack: Can be used
directly to the whip with
standard thread or with the
Quick Connect Base RCA type.



SafetyWhips.com, LLC
#"" &H > ` f_eRZ_GZ/h CUZ
Phoenix, Arizona 8502" USA

tel 602.424.2520
fax 602.424.9777

www.safetywhips.com

08/01/08 web

page 2

Mounts



Window Mount
519.320



Fold Down Pole Mount
Available in 2 sizes.
Order by pipe size:
1.5" PN: **FD01.5**
1.75" PN: **FD01.75**



519.310 Heavy Duty Stainless Steel Spring Mount : Highly recommended to help reduce whip breakage.



Magnet Mount **519.330**



Hitch Mounts



Hitch Mounts available with either a screw mount for the standard threaded whip or with a quick release mount for quick release whips and *Breakdown Whips*. Can be ordered with or without a backup alarm.

HM1: Hitch Mount w/ Standard Screw Mount
HM1A : Hitch Mount w/ Standard Screw Mount & Backup Alarm
HM1Q : Hitch Mount w/ Quick-Connect Base
HM1QA : Hitch Mount w/ Quick-Connect Base & Backup Alarm
all above hitch mounts with 7-Way Trailer Plug



Three optional hitch mounts are available for HMTA Heavy Duty Hitch Mount for Telescoping Whips.
Pole Power Plug Wire with 7-Way Trailer Plug & 107db Backup Alarm shown at left

HMTNP : Heavy Duty Hitch Mount for Telescoping Whips:
Non-Powered
HTM : Heavy Duty Hitch Mount for Telescoping Whips:
Wired w/ 7-Way Trailer Plug
HMTA : Heavy Duty Hitch Mount for Telescoping Whips:
Wired w/ 7-Way Trailer Plug & 107db Backup Alarm

Telescoping Whips



Telescoping Whips :
11, 13, 15 and 21 ft. lengths

TW15-X-15' Telescoping Whip:
Heavy Duty Fiberglass in
3 Locking Sections
Optional Reflective X (16x16") Flag
shown above

Site Locator Pole Light



SITE LOC1x : Site Locator is Brightest Site Locator available. Includes integrated LED Light sensor and 25 foot wire. Visible from 5 miles. Light sensor turns system on automatically at dark, saving your daylight power usage. Poles sold separately, *see at telescoping whip at right above.*

This Site Locator is unrivaled as one of the strongest Site Locator Lights available. The ability to custom build this light using colors and custom sequence can make your light the only one around like it.



SafetyWhips.com, LLC
" " & H > ` f _eRZ_ GZ/h CUŽ
Phoenix, Arizona 8502" USA

tel 602.424.2520
fax 602.424.9777

www.safetywhips.com

08/01/08 web

page 3

LED Lights 9-12V Break-Resistant

Animated LED Tubes



AL8FR Red flashing
 AL8FA Amber flashing
 AL8FB Blue flashing
 AL8FW White flashing
 AL8FG Green flashing
 AL8FUSA R,W,B,R flashing
 AL8FMULTI R,G,B,A flashing




Non-lit 8 LED Tube shown at right
 All twist into 1156 Type Light Socket

Non-Flashing LED Tubes



AL8CR Red (non-flashing)
 AL8CAR Amber, Red (non-flashing)

Animated LED Tubes

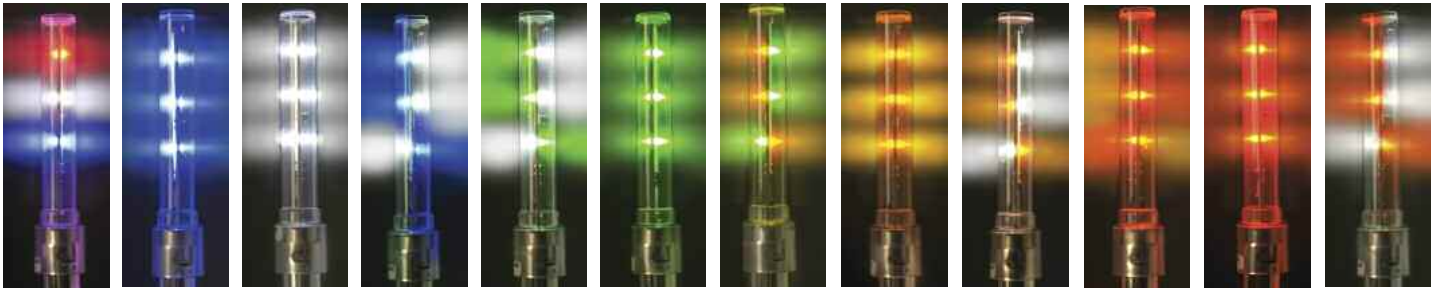

AL6FXRW red/white blue
 AL6FXB blue
 AL6FXW white
 AL6FXBW blue/white
 AL6FXGW green/white
 AL6FXG green
 AL6FXAG amber/green
 AL6FXA amber
 L6FXAW amber/white
 AL6FXAR amber/red
 AL6FXR red
 AL6FXREW red/white

Self-Powered Option

BATPACK: This battery pack is a power, shown at left alternative to wiring. Using three CR2 batteries (not included), this Battery Pack will keep our AL8's glowing for a full work week. Available with 1156 base or set-screw base.



BATPACK-ER KIT: The BatPack-ER Kit fits an existing 1156 socket whip or use set-screw base. It can also be used as a temporary light source in lieu of wiring. Includes the batteries (3 CR2 3volt batteries) and AL8F light (your choice of color). shown at right



Super Bright Non-Fashing LED Tubes

Extra bright and available in 5 colors. This tough light is completely filled with optically clear gel for added robustness. shown at below.



AL2CB Blue
 AL2CW White
 AL2CA Amber
 AL2CR Red
 AL2CG Green

Note: All AL2C's are non-flashing

12 Volt Automotive Type Bulb Use in 1156 Socket



ML-CAP: Optional Metal Cap for ML Shields
 1156 Bulb: 1156 Automotive Bulb 12 Volt
 2.1 Amp SC Bayonet



Lamp Shields: High impact plastic to protect Automotive Type Bulbs on whips
 . Left to right **ML-PLI, ML-PLP, ML-PLB, ML-PLR, ML-PLC, ML-PLA,**
 connect around 1156 socket



SafetyWhips.com, LLC
 # " & H > ` f _eRZ_ GZ/h CUZ
 Phoenix, Arizona 8502" USA

tel 602.424.2520
 fax 602.424.9777

www.safetywhips.com